



CSB Precision Engineering (M) Sdn. Bhd. (600866-V)

No. 30, Jalan Mutiara Emas 5/25, Taman Mount Austin,

81100 Johor Bahru, Johor, Malaysia.

Tel : +607-357 9913 / +607-357 6939


Fax : +607-357 9319

Email : enquiries@csbpe.com.my

Website : www.csbpe.com.my

Melt Blown Filter Cartridges (Multi use type)

Constructed by 3 layers of pure pp fiber. The surface layer of the melt blown filter are designed to low density for high dirt holding capability, while the inner both layer are designed to high density for fine filtration.

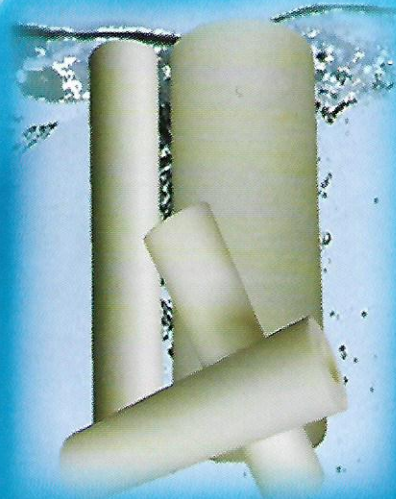

Features :

- @ Media compliance with FDA regulations for food contact under CFR21
- @ High flow rate and low pressure drop.
- @ Fit most of standard housing.
- @ Wide chemical compatibility.

Application :

- # Food & Beverage
- # Prefilter for membrane.
- # Plating
- # Organic Solvent
- # Chemicals
- # PCB process
- # DI water
- # Others

Product Specifications

Media		Pure Polypropylene Fiber				
Nominal Micron Rating		1	5	10	25	50
Dimensions	Unit	Inch			mm	
	Length	10" / 20" / 30" / 40"			254 / 508 / 762 / 1016	
	OD	2.5" / 4.5"			63 / 114	
	ID	1.1"			28	
Type		DOE				

Operation Data :

Maximum Differentials Pressure	40psid (2.7bar) @ ambient temperature
Recommended Change out	30psid (2.1bar)
Maximum Temperature	140° F (60° c)

Packaging Information :

Type	Filter OD	10 inch	20 inch	30 inch	40 inch
1	2.5 inch / 63mm	30pcs/box	30pcs/box	30pcs/box	30pcs/box
2	4.5 inch / 114mm	18pcs/box	9pcs/box	nil	nil

Disclaimer :

It is strongly recommended that you analyze all aspects of your applications and review the information concerning the products or system in the current products catalogue, due to the varieties of operating condition and applications for these products or system. The user, through its own analysis and testing, is solely responsible for making the final selections for the products or systems and assuring that all performance, safety and warning requirements of the application are met.