



CSB Precision Engineering (M) Sdn. Bhd. (600866-V)
 No. 30, Jalan Mutiara Emas 5/25, Taman Mount Austin,
 81100 Johor Bahru, Johor, Malaysia.
 Tel : +607-357 9913 / +607-357 6939
 Fax : +607-357 9319
 Email : enquiries@csbpe.com.my
 Website : www.csbpe.com.my

HTPP String Wound Filter Cartridges (DOE Type)



CSB® HTPP string wound filter cartridges are wound by using FDA grade polyester yarn. Our HTPP wound filter cartridges offer true depth filtration with high dirt holding capacity and extremely low media migration.

Features :

- @ Media compliance with FDA regulations for food contact under CFR21.
- @ Broad chemical and temperature compatibility.
- @ True depth filtration.
- @ High filtration efficiency and non-leaching.
- @ Fit all industrial vessel.
- @ Consistency 150°C operation temperature

Application :


- # Food & Beverage
- # Prefilter for membrane.
- # Plating
- # Organic Solvent
- # Chemicals
- # Dilute acid
- # PCB process
- # DI water
- # Cooking oil
- # Pharmaceuticals
- # Petroleum oil
- # others

Products Specification : -

Filter Media	FDA grade 100% Polyester yarn
Nominal Rating	0.5 , 1 , 3 , 5 , 10 , 15 , 20 , 25 , 30 , 50 , 75 , 100 , 125 , 150 , 200 µm
Core Material	Polypropylene , Stainless steel 304 , Stainless steel 316 , Tin Steel
Inside Diameter	1.1" (28mm)
Outside Diameter	2"(55mm) , 2.5" (63mm) , 2.75" (69mm) , 4.5" (114mm) , Others Diameter
Length	5"(127mm) ,10"(254mm) ,20" (508mm) ,30" (762mm) ,40" (1016mm) ,50" (1270mm) ,60" (1524mm)

Operation Data : -

	Core Type	
	PP	Steel
Maximum Operating Temperature	70° c	150° c
Maximum Differential Pressure	60psi (4.1 bar) (ambient temperature)	
Recommended Change Out	30psi (2.1 bar)	
Nominal Removal Efficiency	Max. 90%	

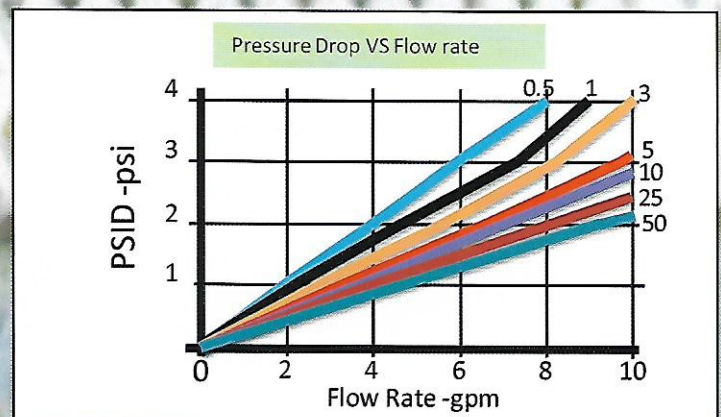

Below table data is based on 2, PSID

Micron	0.5	1	3	5	10	25	50	
Flow Rate	gpm	< 4	4.5	5.5	6.5	7	8	9
	lpm	< 15	17	20.8	24.6	26.5	30.3	34.1
	m³/h	< 0.91	1.02	1.25	1.48	1.59	1.81	2.04